Walking floor Capacity and measurements

Body Capacity

 90 Cu Yds to 126 Cu Yds (70 CuM to 97 CuM)

Standard features

- Constructed from hi-grade aluminium, snap-lock panels
- Designed with strength and payload in mind
- Rear lights protected from damage
- Lower center of gravity for safety
- Full width chassis & axle track for stability
- 2 pac paint finish for protection
- EBS braking system with full data-logger feature

Strength by design


- Substantial top rail to prevent side wall deformation
- Side uprights spaced at 500mm (20") for extra strength
- Abrasive resistant wear plate. (400 Brinell grade)

Options

- Engine Powerpack / VM / Lomardini / Hatz
- 1/2 net manual / hydraulic sheeting system
- 1 piece hydraulic sheeting system
- Payload weighing system
- Nameboards for livery
- . Lifting Axle with auto drop feature
- Roll stability program for extra safety

Controls

- Manual / Pneumatic over hydraulics / in-cab controls
- 2 handed rear door controls to PM 52 Standard
- Remote control option for all functions

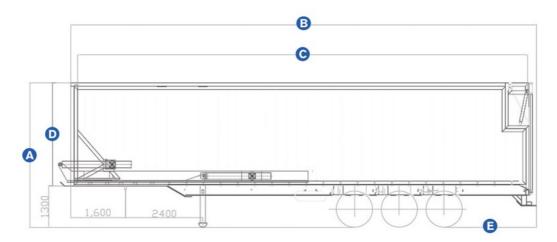

	FastFloor	FastFloor	FastFloor
Trailer type	110	120	130
Capacities (cubic yard)	84	92	99
Dimensions	(mm)		
A Overall height (mm)	3985	4230	4475
B Overall body length (mm)	13600	13600	13600
C Usable body length (mm)	13138	13138	13138
D Internal height (mm)	2667	2914	3162
E Rear overhang (mm)	2697	2697	2697
Chassis beam centres (mm)	1300	1300	1300
Internal width (mm)	2380	2380	2380
Overal trailer width (mm)	2540	2540	2540
Axle track (mm)	ROR 2100		
	SAF 2095		
	Diamler Crysler 2095		
	BPW 2090		

More information can be found: